



# New Aran Sweater

WR2162



Designed by Julie Farmer.

Directions are for size Small; changes for sizes Medium, Large, 1X and 2X are in parentheses.

To Fit Bust: 32 (36, 40, 44, 48)".

Finished Bust Measurement: 36 (40, 44, 47, 50)".

RED HEART® "Eco-Ways™": 6 (7, 7, 8, 8) balls 3533 Misty Violet.

Circular Knitting Needles: 4.5mm [US 7] – 24" and 3.75mm [US 5] – 16".

Yarn needle, stitch holders, stitch markers, cable needle.

**GAUGE:** 24 sts = 4"; 28 rows = 4" with larger needle over cable panel. **CHECK YOUR GAUGE. Use any size needles to obtain the gauge.**

### NOTES

Each Chart has a Wrong Side set up row at the start that will only be used once. Repeat Chart rows from lines A to B.

When following a chart read odd numbered rows from right to left for a Right Side row and even numbered rows from left to right for a Wrong Side row. It is helpful to place stitch markers between cable panels to let you know when one chart ends and the next begins.

### SPECIAL ABBREVIATIONS

**RTPC (Right Purl Cable)** = Slip next st onto cable needle and hold to back, k2, purl 1 from cable needle.

**LFPC (Left Purl Cable)** = Slip next 2 sts onto cable needle and hold to front, p1, k2 from cable needle.

**4LFC (4 st Left Cable)** = Slip next 2 sts onto cable needle and hold to front, k2, k2 from cable needle.

**4RTC (4 st Right Cable)** = Slip next 2 sts onto cable needle and hold to back, k2, k2 from cable needle.

**4RTPC (4 st Right Purl Cable)** = Slip next st onto cable needle and hold to back, k3, p1 from cable needle.

**4LFPC (4 st Left Purl Cable)** = Slip next 3 sts onto cable needle and hold to front, p1, k3 from cable needle

**5RTPC (5 st Right Purl Cable)** = Slip next 2 sts onto cable needle and hold to back, k3, p2 from cable needle.

**5LFPC (5 st Left Purl Cable)** = Slip next 3 sts onto cable needle and hold to front, p2, k3 from cable needle.

**T5LFC (Twist 5 Left Cable)** = Slip next 2 sts onto cable needle and hold to front, k2, p1, then k2 from cable needle.

### SWEATER

#### Back

With larger needle cast on 124 (134, 144, 154, 164) sts. Do not join. Work 3 rows of k1, p1 ribbing.

**Next Row (Wrong Side):** P2, [k3, p2] 3 (4, 5, 6, 7) times, work set up row (read from left to right) of Chart 1, Chart 2, Chart 3, Chart 2, Chart 1, p2, [k3, p2] 3 (4, 5, 6, 7) times.





**Next Row (Right Side):** K2, [p3, k2] 3 (4, 5, 6, 7) times, work Row 1 of Chart 1, Chart 2, Chart 3, Chart 2, Chart 1, k2, [p3, k2] 3 (4, 5, 6, 7) times.  
Continue in this manner, working correct row of patterns, until 15 (15.5, 16, 16, 16.5)" from beginning AND AT THE SAME TIME shape sides by dec 1 st each side every 10 (10, 14, 14, 14)th row 8 (7, 6, 6, 6) times – 108 (120, 132, 142, 152) sts. Work even until 15 (15.5, 16, 16, 16.5)" from beginning, end Wrong Side row.

**Shape Raglans:** Keeping continuity of patterns, bind off 12 sts at beginning of next 2 rows – 84 (96, 108, 118, 128) sts. Dec 1 st each side as follows:  
**S (M, L):** every Right Side row 10 (24, 35) times, then every 3rd row 14 (6, 0) times.  
**(1X, 2X):** every row (20, 26) times, then every 3rd row (18, 17) times.  
Bind off remaining 36 (36, 38, 42, 42) sts.

**Front**  
Work same as for back including all shaping AND AT THE SAME TIME when piece measures 19 (19.5, 20.5, 21.5, 22)" end Wrong Side row to begin neck shaping.

**Divide for Neck:** Work to center 12 (12, 14, 16, 16) sts, attach new ball of yarn, bind off those center sts, complete row. Working both sides at the same time and continuing raglan shaping, bind off 2 sts at each neck edge twice, then dec 1 st at each neck edge every other row 5 (5, 5, 6, 6) times. Continue shaping as for back until 3 sts remain. Bind off.

**Sleeves**  
With larger needle cast on 80 (80, 80, 102, 102) sts. Work 3 rows in k1, p1 ribbing inc 1 (1, 1, 0, 0) st on last row – 81 (81, 81, 102, 102) sts. Follow Chart 4, noting that all WRONG SIDE rows begin at C and all RIGHT SIDE rows end at C, until 15 (15, 16, 16.5, 17)" from beginning, end WS row.

**Shape Raglans:** Keeping continuity of Chart, bind off 9 (9, 9, 12, 12) sts at beginning of next 2 rows – 63 (63, 63, 78, 78) sts. Dec 1 st each side every 3rd row 16 (18, 23, 14, 21) times, then every RIGHT SIDE row 7 (5, 0, 15, 6) times – 17 (17, 17, 20, 24) sts. Bind off.

**FINISHING**

**Neckband**

Sew raglans leaving left back raglan open. With right side facing and smaller needle, starting at back neck pick up and k100 (100, 108, 120, 138) sts evenly around neck. Do not join. Knit every row until neckband measures 1". Bind



off loosely. Sew remaining raglan and neckband seam.

Sew sleeve seams, reversing seam for cuff turn-back. Sew side seams. Turn up cuffs and tack in place.



**RED HEART® "Eco-Ways®"**  
Art. E750 available in 4 oz (113 g),  
186 yd (170 m) balls.

**ABBREVIATIONS:** dec = decrease; inc = increase; **K** = knit; **mm** = millimeters; **P** = Purl; **st(s)** = stitch(es); **St st** = Stockinette stitch; **[ ]** = work directions in brackets the number of times specified; \* or \*\* = repeat whatever follows the \* or \*\* as indicated.

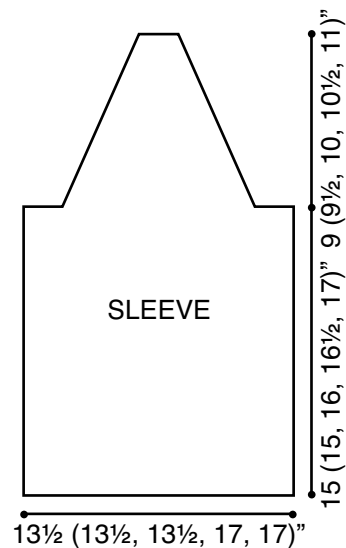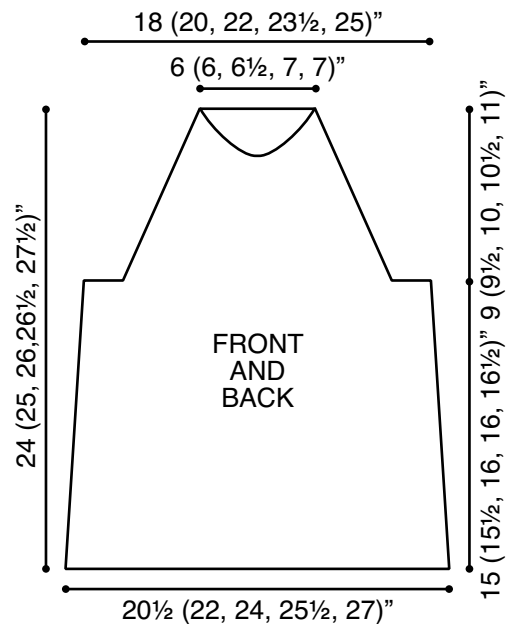




CHART 1

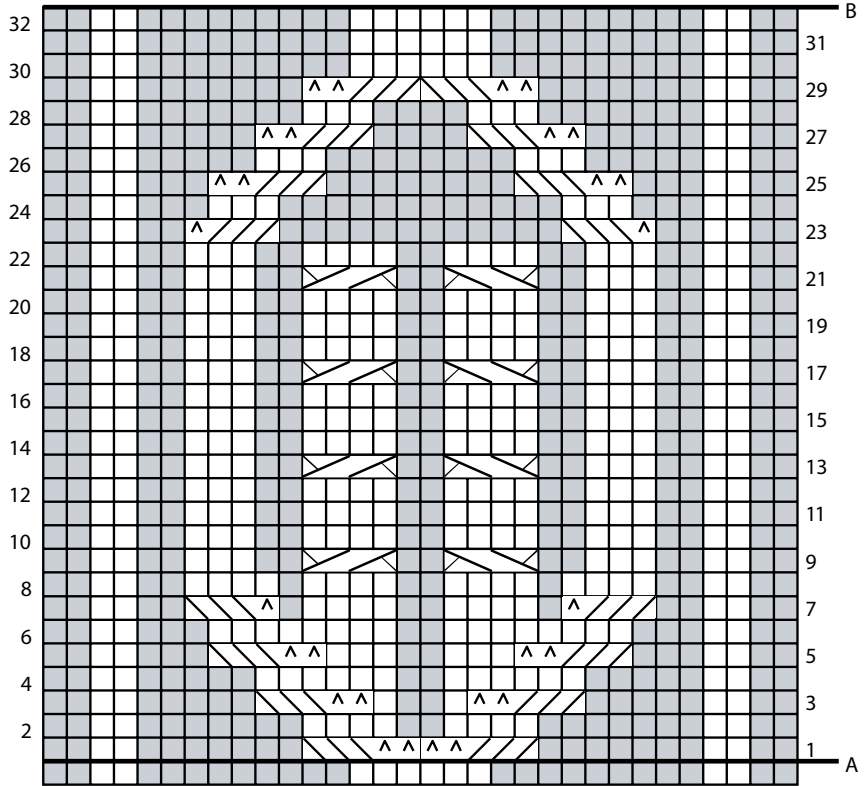


CHART 3

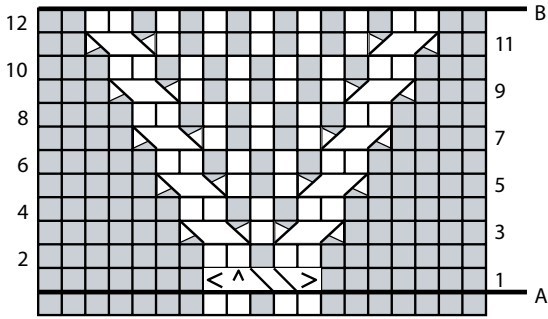


CHART 2

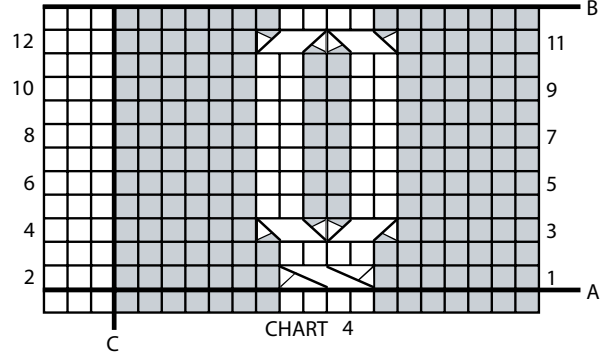


CHART 4

CHART KEY

- = K on RS, P on WS
- = P on RS, K on WS

- = RTPC (Right Purl Cable)= Slip next st onto cable needle and hold to back, k2, purl 1 from cable needle.
- = LFPC (Left Purl Cable)= Slip next 2 sts onto cable needle and hold to front, p1, k2 from cable needle.
- = 4RTC (4 st Right Cable)= Slip next 2 sts onto cable needle and hold to back, k2, k2 from cable needle.
- = 4LFC (4 st Left Cable)= Slip next 2 sts onto cable needle and hold to front, k2, k2 from cable needle.
- = 4RTPC (4 st Right Purl Cable)= Slip next st onto cable needle and hold to back, k3, p1 from cable needle.
- = 4LFPC (4 st Left Purl Cable)= Slip next 3 sts onto cable needle and hold to front, p1, k3 from cable needle.
- = 5RTPC (5 st Right Purl Cable)= Slip next 2 sts onto cable needle and hold to back, k3, p2 from cable needle.
- = 5LFPC (5 st Left Purl Cable)= Slip next 3 sts onto cable needle and hold to front, p2, k3 from cable needle.
- = T5LFC (Twist 5 Left Cable)= Slip next 2 sts onto cable needle and hold to front, k2, p1, then k2 from cable needle.

